


Other Environmental Services

- Used Oil Recycling
- Used Oil Filter Recycling
- Used Antifreeze Recycling
- Vacuum Services
- Waste Transportation and Disposal
- Industrial Cleaning
- Site Remediation
- Tank Cleaning
- Parts Washer Services

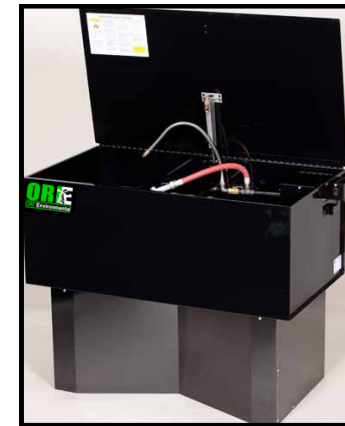

ORI Recovery, Inc.
308 N. Fonshill Ave
Oklahoma City, OK 73117
855.943.8969 ph
405.943.9108 fax

2258 West New Orleans St
Broken Arrow, OK 74011
918.872.1024 ph
918.872.1424 fax

6553 South I-35
Gainesville, Tx 76240
855.943.8969 ph
405.943.9108 fax

www.oilsrecovery.com

Parts Washer Services

ORI Recovery, Inc.
Oklahoma City, OK



Parts Washer Services

ORI Environmental provides an environmentally friendly and economic parts washer service. Our service plans are tailored to meet our customers needs and budget. We use non-hazardous solvents to reduce our customers waste stream.

- **Solvent Based or Aqueous Washers**
- **Non-Hazardous Solvents Only**
- **Flexible Service Plans**
- **Lease or lease-to-own parts washer units available**
- **Service options for customer owned parts washer systems**
- **Meets Federal & State Environmental Regulations**


Environmentally Friendly

WE USE ONLY VIRGIN PETROLEUM BASED 142 FLASH SOLVENTS OR AQUEOUS CLEANERS. WE RECYCLE ALL USED PETROLUEM SOLVENTS THROUGH OUR FUEL BLENDING PROGRAM. ALL AQUEOUS CLEANERS CAN BE DISPOSED OF AS NON-HAZARDOUS MATERIAL.



Choose From

- **Drum Mounted Units**
- **Bench Units**
- **Cabinet Units**
- **Brake Cleaners Units**
- **Paint Gun Cleans**
- **Recyclers**

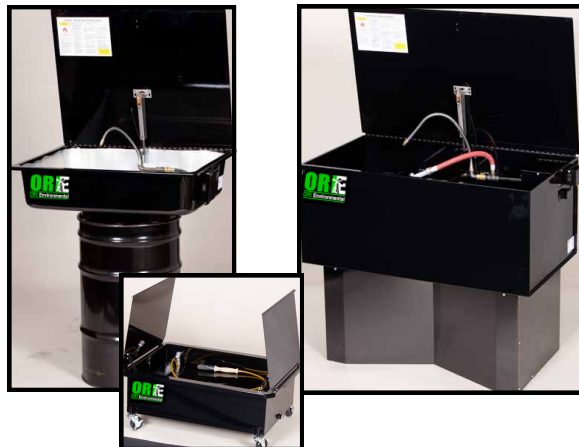

Aqueous Parts Washers

EcoMaster 1435

Aqueous portable brake washer. Drum mounted for easy waste disposal. Our dual filtration system helps to extend the life of the cleaning solution. Equipped with a flow through brush and spigot; making your cleaning job fast and easy. The dual purpose cover can be used as a cover or as a catch basin. Use it on alignment lifts, ramp lifts or place it on the floor.



EcoMaster 230

Drum mounted aqueous parts washer. Equipped with a flow-through brush and spigot; making your cleaning job fast and easy. Designed for easy removal of old solution by swapping out the drum.




Both EcoMaster 1430 and 230 are for use with an aqueous based cleaning solution only!

Clean Products Parts Washer Service Provider

ORI Environmental is an approved [Clean Products](#) parts washer service provider.

ORIE can perform routine maintenance and solvent changes.

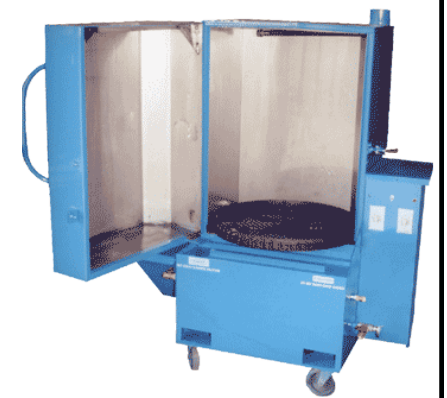

S50M Paint Gun Cleaner



The New BECCA S50M Manual Flex Spray Gun Cleaner is designed to meet the challenges of getting paint spray guns clean quickly....

- Cleans all of the fluid passageways
- Protects air passageways to prevent contamination and corrosion

Features

- ◆ Stainless Steel Basin - compact design
- ◆ Powerpistol - quick & powerful spray gun cleaner
- ◆ Powerclean - compressed air connection
- ◆ Pulsating fluid- Powerful Cleaning Efficiency
- ◆ Used/Clean Fluid Control- 50% solvent saving
- ◆ Splash Pad - to reduce splash
- ◆ Flow Brush - stiff nylon bristles for powerful cleaning
- ◆ Foot Pedal - pump control for hands free operation
- ◆ High Flow QDs - high flow solvent resistant
- ◆ Red Powder Coated Finish - long maintenance life
- ◆ Air Filter/Regulator - proper system air control

Optional Upgrades:

- ◆ Solventwash Cartridge Filtration
- ◆ Mounting Stand with Legs or Wall Mount Kit

S10A Paint Gun Cleaner



The New BECCA S10A Automatic Spray Gun Cleaner is designed to meet the challenges of getting paint spray guns clean quickly....

- Cleans all of the fluid passageways
- Protects air passageways to prevent contamination and corrosion

Features

- ◆ Stainless Steel Basin with Cover - oversized work area
- ◆ Powerclean - compressed air connection
- ◆ Pulsating fluid- Powerful Cleaning Efficiency
- ◆ Used/Clean Fluid Control- 50% solvent saving
- ◆ High Flow QDs - high flow solvent resistant
- ◆ Red Powder Coated Finish - long maintenance life
- ◆ Input Air Filter/Regulator - proper system air control
- ◆ NESHAP Compliant - meets NESHAP requirements

Optional Upgrades:

- ◆ Solventwash Cartridge Filtration
- ◆ Fluid Reservoir - 5 gallon Steel Cans to hold Clean and/or used fluid

STILLClean™

WHY SHOULD I USE STILLCLEAN TO RECYCLE MY OWN SOLVENT?

The StillClean takes the dirty solvent from your parts cleaner and uses a patented, low-temperature vacuum distillation process to separate your solvent into two parts: clean, water-like solvent, and oil. The pure solvent is returned to your parts washer and the oil can be combined with your used oil.

STILLCLEAN BENEFITS

- ◆ Simple onsite solvent recycling
- ◆ Continuous clean, pure solvent
- ◆ Slash solvent service costs
- ◆ Slash hazardous waste disposal
- ◆ Lower your environmental liability
- ◆ Multiple applications
- ◆ *Pays for itself!*



STILLCLEAN FEATURES

- ◆ Actual distillation -- not filtration
- ◆ Small, light-weight and portable
- ◆ No troublesome and noisy vacuum pump
- ◆ ETL Listed to UL Standards 201 and 2208
- ◆ Use on multiple parts cleaners
- ◆ *Pays for itself!*



CleanMaster 400

Table top solvent parts washer. Equipped with flow-through brush which works great for cleaning small parts. This unit could be used as a table top parts washer or use with the optional rolling cart for a more portable solution. For use with petroleum based solvents with a flash point over 104°F. Not to be used with chlorinated solvents.



Optional Adjustable Cart

Features

- ◆ Durable, baked on powder coated epoxy finish
- ◆ Split-lid with fusible links 165°F
- ◆ Removable work tray
- ◆ Flow-through brush for efficient cleaning
- ◆ Easy-roll swivel casters (2 locking)

Specifications

- ◆ Overall dimensions: 36" L x 26" W x 12" H
- ◆ Inside dimensions: 32" L x 22" W x 10" H
- ◆ Shipping dimensions: 37 1/2" L x 27 1/2" W x 13" H
- ◆ Weight: 50 lbs.
- ◆ Fluid capacity: 17 1/2"
- ◆ Maximum fluid depth: 5 3/4"
- ◆ Minimum fluid depth: 2 3/4"
- ◆ Voltage: 115VAC/60HZ/1PH/1 Amp
- ◆ Pump: Fractional

CleanMaster 230

Industrial drum mounted solvent parts washer. Built-to-last for years of reliable service. Equipped with flow-through brush and "stay-put" flexible spigot that directs and holds power rinse where you want it. For use with petroleum based solvents with a flash point over 104°F. Not to be used with chlorinated solvents.



Features

- ◆ Removable screen filter for pump protection
- ◆ Stay-put flexible metal spigot
- ◆ Flow-through brush with adjustable fluid control
- ◆ Durable baked on powder coated epoxy finish
- ◆ Meets 0.75 freeboard requirements
- ◆ Heavy-duty industrial grade pump
- ◆ Spring loaded door closure with fusible link 165°F
- ◆ Single on/off switch for pump and optional light kit
- ◆ Galvanized drawn sink

Specifications

- ◆ Overall dimensions: 34 1/2" L x 26 1/2" W x 63" H
- ◆ Inside dimensions: 32" L x 24" W x 7 1/2" H
- ◆ Shipping dimensions: 37" L x 28" W x 16" H
- ◆ Weight: 68 lbs.
- ◆ Fluid capacity: 30 gallon (drum optional)
- ◆ Maximum fluid depth: 26 1/2"
- ◆ Minimum fluid depth: 8 3/4"
- ◆ Load lift over: 37
- ◆ Voltage: 115VAC/60HZ/1PH/1 Amp
- ◆ Pump: Fractional

CleanMaster 440

Clean and Soak solvent parts washer. Equipped with pistol grip spray nozzle and "stay-put" flexible spigot that directs and holds power rinse where you want it. For use with petroleum based solvents with a flash point over 104°F. Not to be used with chlorinated solvents.



Features

- ◆ Durable, baked on powder coated epoxy finish
- ◆ Split-lid with fusible links 165°F
- ◆ 3/4" drain plug located on bottom front of machine for easy draining
- ◆ Stay-put flexible metal spigot
- ◆ Pistol grip spray nozzle
- ◆ Removable inside cabinet shelf

Specifications

- ◆ Overall dimensions: 44" L x 24 1/2" W x 61" H
- ◆ Inside dimensions: 43" L x 24" W x 17" D
- ◆ Shipping dimensions: 48" L x 27 1/2" W x 20 1/2" H
- ◆ Weight: 175 lbs.
- ◆ Fluid capacity: 40 Gallons
- ◆ Maximum fluid depth: 8 3/4"
- ◆ Minimum fluid depth: 5 3/4"
- ◆ Load lift over: 36"
- ◆ Soaking Depth: 9"
- ◆ Voltage: 115VAC/60HZ/1PH/1 Amp
- ◆ Pump: Fractional

CleanMaster 80

Agitating lift solvent parts washer. Equipped with flow through brush. Heavy-duty automated lift platform rises out of the solvent for easy loading and unloading of parts. For use with petroleum based solvents with a flash point over 104°F. Not to be used with chlorinated solvents.



Features

- ◆ Pre-set 120 psi filter regulator with auto drain
- ◆ Lift operates on 120 psi air pressure
- ◆ Flow-through hand held brush
- ◆ 12-gauge tank thickness
- ◆ Agitation speed adjustable from 0 to 160 rpm

Specifications

- ◆ Overall dimensions: 52 1/2" L x 34" W x 66 1/2" H
- ◆ Inside dimensions: 44 1/2" L x 27 1/2" W x 28" D
- ◆ Carrier dimensions: 41 1/2" L x 17 1/2" W
- ◆ Shipping dimensions: 56 1/2" L x 36 1/2" W x 56" H
- ◆ Weight: 556 lbs.
- ◆ Fluid capacity: 80 Gallons
- ◆ Maximum fluid depth: 15 1/2"
- ◆ Minimum fluid depth: 9 1/2"
- ◆ Load lift over: 38"
- ◆ Load capacity: 250 lbs.
- ◆ Lift requirements: 8CFM@120 PSI
- ◆ Voltage: 115VAC/60HZ/1PH/1 Amp
- ◆ Pump: Fractional